

# Qualnet Simulation of channel collision between IEEE 802.15.4 and IEEE 802.11b for various Topologies

G.M.Tamilselvan, *Member, IACSIT*, Dr.A.Shanmugam

**Abstract**— Coexistent heterogeneous wireless networks may interfere with each other and result in significant performance degradation when devices are collocated in the same environment. With the increasingly deployed Wireless Personal Area Network (WPAN) and Wireless Local Area Network (WLAN) devices, channel conflict has become very frequent and severe when one WPAN technology coexists with other WLAN technologies in the same interfering range. In this paper, we study the coexistence issue between IEEE 802.15.4 and IEEE 802.11b. We present analytical models on the non-conflicting channel allocation probabilities, focusing on the coexistence scenarios of IEEE 802.15.4 coexisting with IEEE 802.11b. The interference model of IEEE 802.15.4 wireless Personal area network (WPAN) affected by IEEE 802.11b wireless Local area network (WPAN) also presented. The packet error rate (PER) of the IEEE 802.15.4 under the interference of the IEEE 802.11b is analyzed, and is obtained by the bit error rate (BER) and the collision time. The BER is obtained from signal to noise and interference ratio. The safe distance ratio can be obtained from the PER. The analytic results are validated for various topologies using Qualnet 4.5 simulation. Further this paper investigates the PER of IEEE 802.15.4, with the consideration of the mobility models of the WLAN nodes. Simulation results are analyzed for the mobility model with varying speed.

**Index Terms**— Bit Error Rate, Coexistence, IEEE 802.11b, IEEE 802.15.4.

## I. INTRODUCTION

Various wireless technologies have been developed for WPAN purposes. For instance, Bluetooth [1] (as described by the IEEE 802.15.1 standard [2]) has been proposed as a cable replacement technology for wireless personal devices. IEEE 802.15.3 standard [3] has been proposed for High Rate WPAN (HR-WPAN) applications, and IEEE 802.15.4 standard [4] has been drafted for Low Rate WPAN (LR-WPAN) uses. Since IEEE 802.15.1, IEEE 802.15.3, and IEEE 802.15.4 all operate in the same 2.4GHz ISM (Industrial-Scientific-Medical) frequency band, channel allocation conflicts are inevitable between these WPAN technologies. The coexistence issues will become even severe while these WPAN technologies also become even

severe while these WPAN technologies also coexist with other 2.4GHz based wireless/radio technologies (e.g. IEEE 802.11b/g [5], cordless phone, and microwave oven). It soon becomes important to understand the characteristics of each channel allocation scheme and how each channel allocation scheme interacts with the others. Table I summarizes some of the relevant properties of the wireless standards mentioned above.

TABLE I WIRELESS TECHNOLOGIES IN 2.4 GHZ ISM FREQUENCY BAND.

IEEE Standard	802.11b/g	802.15.1	802.15.3	802.15.4
Frequency Band	2.4GHz	2.4GHz	2.4GHz	2.4GHz
rev Bandwidth	22MHz	1MHz	15MHz	2MHz
Number of Channels	11	79	5	16
Max Rate (Mbps)	11/ 54	0.72	55	0.25
Transmission Range	100m	10m	10m	20m
Applications	WLAN	WPAN	HR-WPAN	LR-WPAN

Some related researches study the coexistence problem between the IEEE 802.15.4 and the 802.11b [5], [6]. In [5], the packet error rate (PER) of the IEEE 802.15.4 under the IEEE 802.11b and IEEE 802.15.1 is obtained by experiments only. In [6], the impact of an IEEE 802.15.4 network on the IEEE 802.11b devices is analyzed. Channel Conflict Probabilities between IEEE 802.15 based Wireless Personal Area Networks is modeled in [7]. Packet Error Rate of IEEE 802.15.4 under IEEE 802.11b interference is analyzed in [8]. In [9] Packet Error Rate of IEEE 802.11b under IEEE 802.15.4 interference is analyzed. The channel conflict probabilities between IEEE 802.11b and IEEE 802.15.4 have been modeled in [12].

In [12], PER analysis of IEEE 802.15.4 for circular and grid topology is given. In this paper, the mobility model is introduced and the results are analyzed for various speeds. We present analytical model to calculate the channel collision probability between IEEE 802.11b and IEEE 802.15.4 networks. The coexistence issue between IEEE 802.15.4 and IEEE 802.11b using PER analysis for various parameters is studied with help of Qualnet 4.5 simulation.

The rest of the paper is organized as follows. In section II, we present analysis on the probability of channel collision between IEEE 802.11b and IEEE 802.15.4 networks. In

Manuscript Received February, 2009

G.M.Tamilselvan is with the Department of Electronics and Communication Bannariamman Institute of Technology, Sathyamangalam-638401 Erode dt, Tamilnadu, India.

Dr.A.Shanmugam is with the Department of Electronics and Communication, Bannariamman Institute of Technology, Sathyamangalam, Erode dt-638401, Tamilnadu, India

section III, PER of the IEEE 802.15.4 under the interference of IEEE 802.11b is analyzed with the help of Qualnet 4.5 simulation. Finally, conclusions are presented in Section IV.

## II. PROBABILITY OF CHANNEL COLLISION BETWEEN IEEE 802.11B AND IEEE 802.15.4

To proceed to the analysis of our study, we briefly recap the channel allocation mechanism of the IEEE 802.11b and IEEE 802.15.4 standards. Basically, IEEE 802.11b employs Direct Sequence Spread Spectrum (DSSS) technique, and it defines 14 channels with 22 MHz bandwidth for each one. In U.S. and most of the countries in the world, the first 11 channels are used; whereas, the first 13 channels are used in Europe and Singapore, and all of the 14 channels are used in Japan. The central frequencies of IEEE 802.11b channels are separated by 5 MHz as shown in Eq. 1.

$$f_{IEEE802.11b} = 2412 + 5k; k = 0::: 13 \quad (1)$$

However, since adjacent IEEE 802.11b channels are partially overlapped, the so-called *adjacent channel interference* will happen if two IEEE 802.11b nodes in close operate using adjacent channels. In this case, the overall network performance will become degraded. Therefore, in practice, only the maximum non-overlapping channels (i.e., channel 1, 6, and 11) are employed in most of nowadays IEEE 802.11b networks. Therefore, the analysis presented in this paper would be based on the assumption that only the maximum non overlapping channels are used in IEEE 802.11b networks (as shown in Fig.1).

On the other hand IEEE 802.15.4 also employs DSSS on PHY layer, and it is operated in three frequency bands. Among a total of 27 channels (with 2MHz width for each channel) across these three bands, sixteen channels are available in the 2.4GHz band with 250 kbps maximum data throughput, 10 in the 915MHz band with 40 kbps maximum data throughput, and 1 in the 868 MHz band with 20 kbps maximum data throughput. The center frequency of these channels is defined as follows:

$$f = \begin{cases} 868.3; k = 0 \\ 906 + 2(k - 1); k = 1 \dots 10 \\ 2405 + 5(k - 11); k = 11 \dots 26 \end{cases} \quad (2)$$

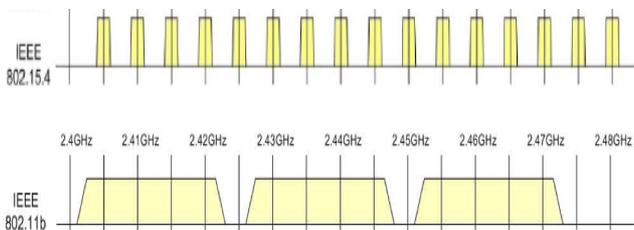


Fig. 1 Channel allocations of IEEE 802.11b and IEEE 802.15.4 technologies

In this section, we present analysis on the non-conflicting channel allocation probability, i.e.,  $P_{good}$ , when an IEEE 802.15.4 network coexists with  $n$  IEEE 802.11b networks. For simplicity, we assume the employed channels of the  $n$  IEEE 802.11b networks are not conflicted (i.e., non-overlapping channels and  $n \leq 3$ ). Note that we do not consider scenarios consisting of multiple IEEE 802.15.4

networks. When one IEEE 802.15.4 network coexists with  $n$  IEEE 801b networks, there are two possible cases: a) the IEEE 802.15.4 network operates on one of the four non-overlapped channels (i.e. the IEEE 802.15.4 channels are not overlapped with IEEE 802.11b channels, as shown in Figure 1); b) the IEEE 802.15.4 network operates on one of the overlapped channels.

In the first case, the probability of non-conflicting channel allocation is always 1 regardless of the number of coexisting IEEE 802.11b networks. Whereas in the second case, the probability of non-conflicting channel allocation is  $\frac{3-n}{3}$ . By un-conditioning the two cases, the  $P_{good}$  for a single IEEE 802.15.4 network coexisting with  $n$  IEEE 802.11b networks can be calculated by:

$$P_{good} = \begin{cases} \frac{4}{16} + \frac{12}{16} \times \frac{3-n}{3}; 0 \leq n \leq 3; \\ 0; otherwise \end{cases} \quad (3)$$

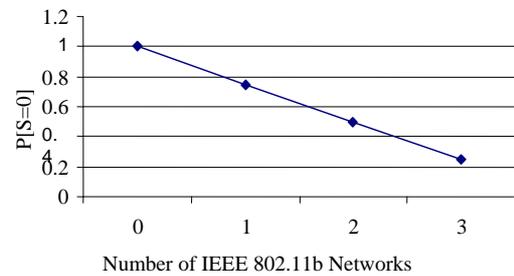


Fig 2. Analytical results of P[S=0] while one IEEE 802.15.4 network coexist with multiple IEEE 802.11b networks

Fig.2 illustrates the relationship of  $P_{good}$ , i.e. P[S=0] and the number of coexisting IEEE 802.11b network for a single IEEE 802.15.4, which shows  $P_{good}$  decreases linearly as  $n$  increases. These analytical results will be validated in the subsequent sections with Qualnet 4.5 simulation

## III. PER ANALYSIS OF IEEE 802.15.4 NETWORK UNDER THE INTERFERENCE OF IEEE 802.11B NETWORKS

### A. Bit Error Rate Evaluation of IEEE 802.15.4 under IEEE 802.11b

The PHY of the IEEE 802.15.4 at 2.4 GHz uses offset quadrature phase shift keying (OQPSK) modulation. Denote that the  $E_b/N_0$  is the ratio of the average energy per information bit to the noise power spectral density at the receiver input, in the case of an additive white Gaussian noise (AWGN) channel. Then the bit error rate (BER),  $P_B$ , can be expressed as

$$P_B = Q\left(\sqrt{\frac{2E_b}{N_0}}\right) \quad (4)$$

Where  $Q(x)$  is

$$Q(x) = \frac{1}{\sqrt{x}} \int_x^{\infty} \exp\left(-\frac{u^2}{2}\right) du \quad (5)$$

Fig.3 shows the relationship between the bit error rate and the  $E_b/N_0$  simulated in Matlab.

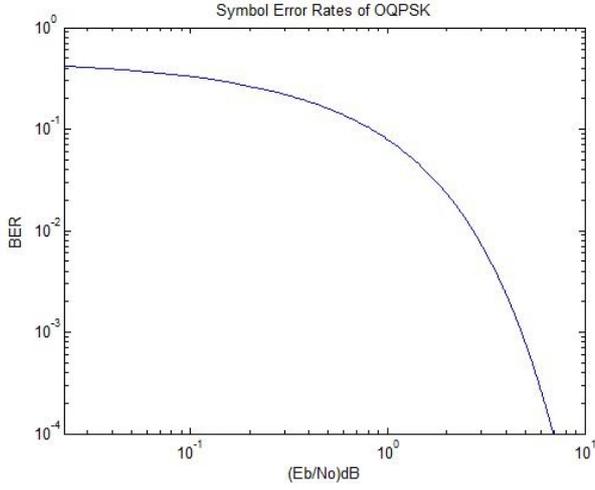


Fig. 3 Theoretic Bit Error Rate of OQPSK

### B. Collision Time Evaluation of IEEE 802.15.4 under IEEE 802.11b

In this paper, blind transmissions are assumed for both IEEE 802.15.4 and IEEE 802.11b. In other words, they transmit the packets without consideration of the channel state whether busy or not to make the worst case interference environments. If both standards use the carrier detection method to determine the channel state, the blind transmission will occur. Then, the interference model can be illustrated as shown in Fig.4. In Fig.4,  $T_X$ ,  $L_X$ , and  $U_X$  denote the inter-arrival time, packet duration, and average random backoff time, respectively, where the subscript  $X$  is either  $Z$  for the IEEE 802.15.4 and  $W$  for the IEEE 802.11b. The other parameters are listed in Table II. The  $T_C$  is the collision time.

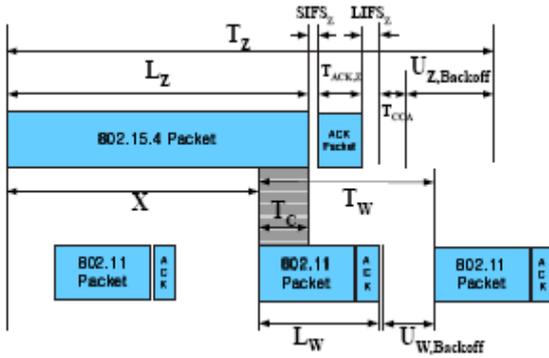


Fig. 4. Interference model between IEEE 802.15.4 and IEEE 802.11b

If the blind transmissions are assumed, the transmissions of the IEEE 802.15.4 and IEEE 802.11b are independent. Since the both protocols transmit packets without consideration of the channel state, the contention window not changed by the busy channel. The transmission of the IEEE 802.11b packet is assumed to be error-free, so there is no increase of the contention window of the IEEE 802.11b. Therefore, in both protocols, the back off time is randomly chosen within the minimum contention window, i.e.,  $CW_{min}$ .

Then, the inter-arrival times,  $T_W$ ,  $T_Z$  can be easily obtained as:

$$T_Z = L_Z + T_{CCA} + SIFS_Z + T_{ACK,Z} + \frac{CW_{min,Z} - 1}{2} U_Z \quad (6)$$

and

$$T_W = L_W + SIFS_W + T_{ACK,W} + DIFS + \frac{CW_{min,W} - 1}{2} U_W \quad (7)$$

where  $T_{CCA}$  denote the CCA time of the IEEE 802.15.4.

The following table shows the parameters of the interference model.

TABLE II PARAMETERS OF THE INTERFERENCE MODEL

$T_Z$	Inter-arrival time between two IEEE 802.15.4 packets
$L_Z$	Length of IEEE 802.15.4 packet
$SIFS_Z$	Short IFS of IEEE 802.15.4
$T_{ACK,Z}$	Duration of IEEE 802.15.4 ACK packet
$CW_{min,Z}$	Minimum CW size of IEEE 802.15.4
$U_Z$	Average backoff time of IEEE 802.15.4
$T_W$	Inter-arrival time between two IEEE 802.11b packets
$L_W$	Length of IEEE 802.11b packet
$SIFS_W$	Short IFS of IEEE 802.11b
$DIFS$	DCF IFS of IEEE 802.11b
$T_{ACK,W}$	Duration of IEEE 802.11b ACK packet
$CW_{min,W}$	Minimum CW size of IEEE 802.11b
$U_W$	Average back off time of IEEE 802.11b

Assume that the time offset  $x$  is assumed uniformly distributed in  $(0; T_Z)$ , then, the collision time,  $T_C$  can be obtained as:

$$T_C(x) = \left\{ \begin{array}{l} L_Z - 2(T_W - L_W), 0 \leq x \leq L_Z - 2T_W \\ 2L_W, L_Z - 2T_W < x \leq T_W - L_W \\ 3L_W + x - T_W, T_W - L_W < x \leq L_Z - (T_W + L_W) \\ L_Z - 2(T_W - L_W), L_Z - (T_W + L_W) < x \leq L_Z - T_W \\ 2L_W, L_Z - T_W < x \leq 2T_W - L_W \\ 3L_W + x - 2T_W, 2T_W - L_W < x \leq L_Z - L_W \\ L_Z - 2(T_W - L_W), L_Z - L_W < x \leq 2T_W \\ 2L_W, 2T_W < x \leq T_Z \end{array} \right. \quad (8)$$

Fig.5 shows the collision time with varying time offset  $x$ .

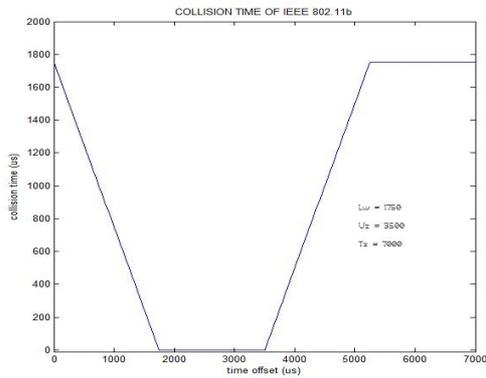


Fig 5 Collision Time

Now, the packet error rate (PER) is easily obtained from the BER and the collision time,  $T_C$ . For simplicity, acknowledgement (ACK) packets of both IEEE 802.11 and IEEE 802.15.4 are not considered. Let's denote the  $P_B$  and  $P_B^I$  that the BER without and with interference, respectively. If the bit duration of the IEEE 802.15.4 is  $b$ , then the PER,  $P_P$ , is expressed as

$$P_P = 1 - \left( 1 - (1 - P_B)^{L_z - \lceil T_C/b \rceil} \right) \left( 1 - (1 - P_B^I)^{\lceil T_C/b \rceil} \right) \quad (9)$$

In this section the PER of IEEE 802.15.4 under the interference of IEEE 802.11b is analyzed using Qualnet 4.5 simulation. For simulation, the slotted CSMA/CA of the IEEE 802.15.4 model is developed using Qualnet 4.5. The complementary code keying (CCK) modulation with 11 Mbps is used for the IEEE 802.11b. The payload size of the IEEE 802.15.4 is 105 bytes, and that of the IEEE 802.11b is 1500 bytes. The simulation scenario is shown in Fig. 6.

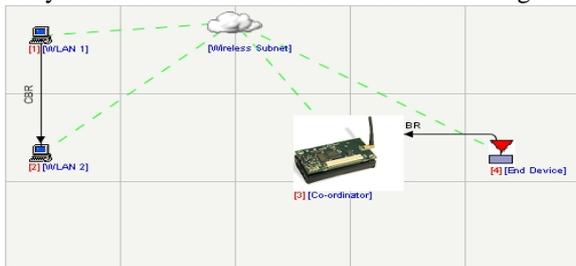


Fig. 6. Simulation Model between IEEE 802.15.4 and IEEE 802.11b

For simplicity, only the IEEE 802.15.4 End device and IEEE 802.11b WLAN 1 transmit data packets. The other nodes send only the ACK packets for the corresponding data packets. The distance between two IEEE 802.15.4 devices and that of the two IEEE 802.11b devices are fixed to 1 m. The distance between IEEE 802.15.4 Coordinator and the IEEE 802.11b WLAN 1 is  $d$ , which is variable. Fig.7 shows the PER of the IEEE 802.15.4 under the interference of the IEEE 802.11b with the same center frequencies. The distance between Coordinator and WLAN 1,  $d$ , varies from 1m to 10m.

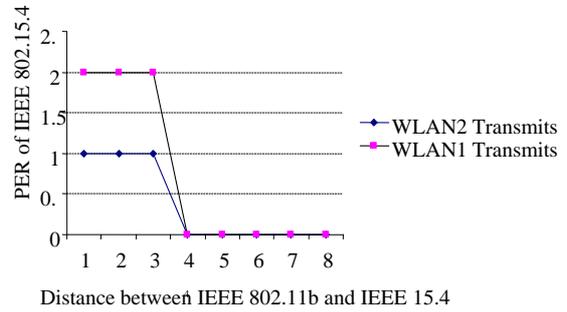


Fig 7. PER of the IEEE 802.15.4 without considering the power spectral density of the IEEE 802.11b

From this simulation it is observed that when WLAN1 transmit data packets result in more PER than WLAN2 transmit data packets. When the transmission direction of IEEE 802.11b and IEEE 802.15.4 is opposite to each other then negligible packet error rates is obtained. When the number of IEEE 802.11b nodes are increased the packet error rate of IEEE 802.15.4 node is increased accordingly.

Fig.8 shows the PER of IEEE 802.15.4 with 105 bytes of IEEE 802.15.4 payload when the number of WLAN transmission varies from 1 to 5. The distance between WLAN and IEEE 802.15.4, ranges from 1 to 8 m Since the PERs of IEEE 802.15.4 are near 1 with distance  $< 4$  m. As the number of WLAN sources increases, the PER of IEEE 802.15.4 increases because contentions among multiple WLANs increase the channel usage and cause collisions, which is more powerful interference source to. Also distance decreases, the PER of IEEE 802.15.4 increases because of increased interference by WLAN packet transmissions.

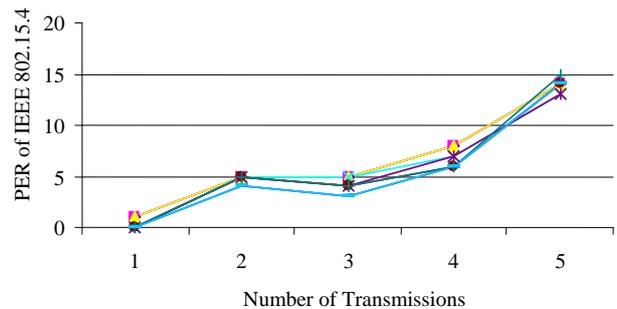


Fig. 8. PER of IEEE 802.15.4 for multiple IEEE 802.11b transmissions

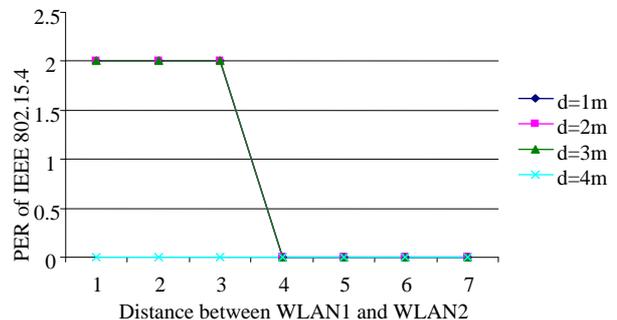


Fig. 9. PER of the IEEE 802.15.4 for various Distances  $d$  between WLAN1 and WLAN2

The PER of IEEE 802.15.4 is calculated by varying the distance between WLAN1 and WLAN2. Fig.9 shows that the PER is negligible for the distances,  $d > 3$ m. The same PER analysis can be extended for grid topology and circular topology with 20 nodes

Fig.10 shows the simulation of grid topology. PER of IEEE 802.15.4 is calculated for every increase of 5 nodes. In this simulation 50% of the nodes are assumed for transmission. The Fig.11. Shows the PER of IEEE 802.15.4 for every increment of 5 nodes. It is found that PER increases when the number of nodes increases. The PER is calculated with the assumption that 50% of the WLAN nodes are transmission nodes.

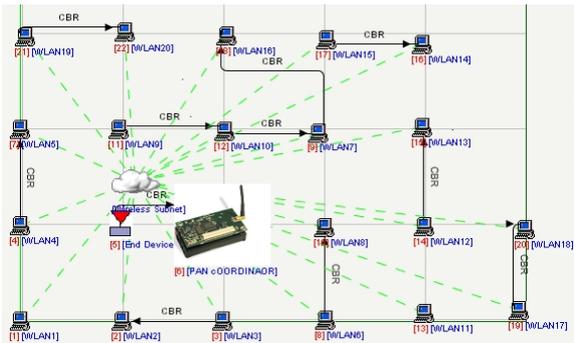


Fig.10 Grid topology Simulation Model between IEEE 802.15.4 and IEEE 802.11b

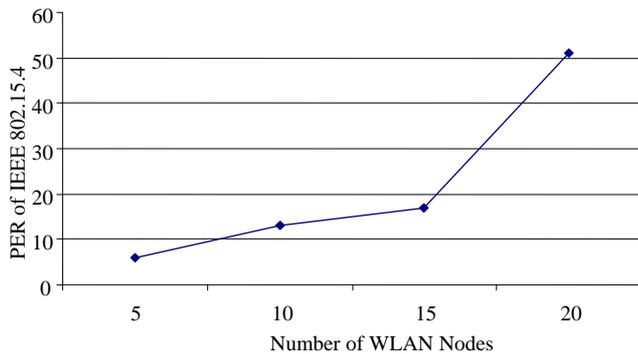


Fig .11 PER of IEEE 802.15.4 for Grid Topology with 20 nodes

Circular topology Simulation Model between IEEE 802.15.4 and IEEE 802.11b is shown in Fig.12. The distance between WLAN nodes and the distance between WPAN devices is 1m. The distance between PAN coordinator and WLAN nodes are configured as 5m. Total number of WLAN nodes are 20 and all the nodes are placed at equal distance from the PAN coordinator. End device transmits data packets to Coordinator, and Coordinator may respond with ACK packets. For circular topology, the distance between ZigBee Coordinator to each WLAN source is identical. When more than two WLAN sources tries to transmit packets, contentions will occur which result in collisions. The simulation is carried out with the assumption of transmission strategy. When multiple nodes transmit simultaneously the contention occurs. The analysis is completed for each 10% of increased node transmission. The analysis results are plotted in Fig.13

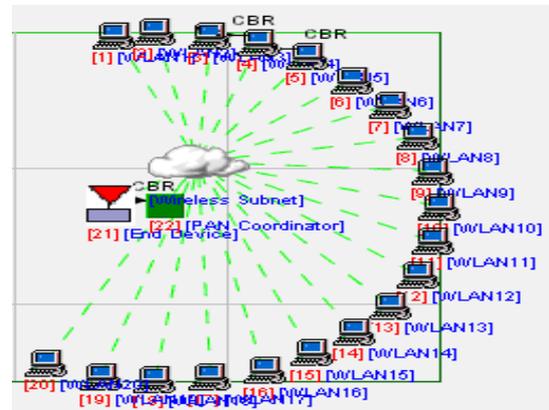


Fig. 12 Circular topology Simulation Model between IEEE 802.15.4 and IEEE 802.11b

The Fig 13 shows the PER of IEEE 802.15.4 for circular topology. PER increases with the increase of number of transmission nodes. Because of collision the number of packets received with error is increased. The PER of IEEE 802.15.4 for circular topology, when the nodes are moving randomly is calculated and shown in Fig.14.

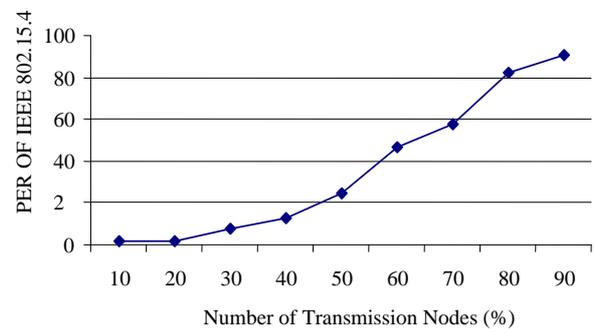


Fig.13 PER of IEEE 802.15.4 for circular Topology with 20 nodes

PER is calculated when the transmitting nodes are moving randomly with the maximum speed of 10 metre/sec. From the figure it is clear that PER is not increasing merely when the number of simultaneous transmission increases. When the WLAN nodes are moving randomly the proximity between the nodes decide the packet error rate. Less proximity results in least error even though the transmitting nodes are moving randomly.

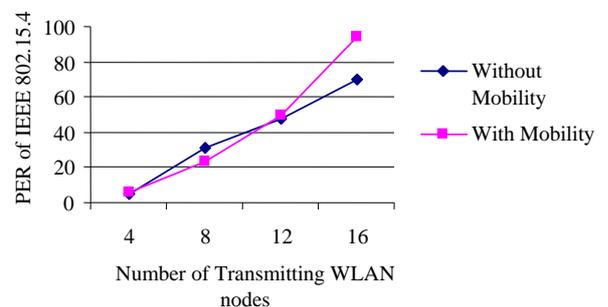


Fig 14. PER of IEEE 802.15.4 with the Mobility model for Circular topology

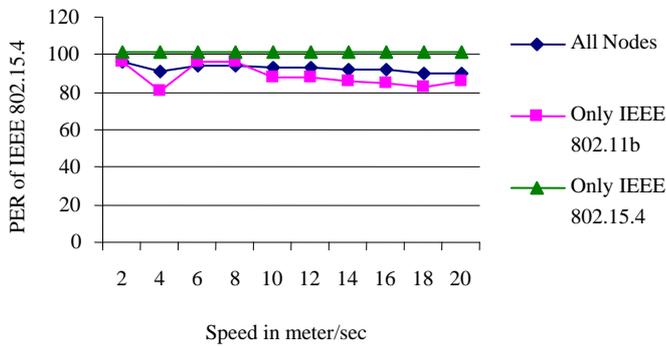


Fig 15 PER of IEEE 802.15.4 with the Mobility model (various speeds) for Circular topology

The PER of IEEE 802.15.4 for circular topology with variable speed can be calculated. The speed is varied from 2 to 20 meter/sec with the step of 2 meter/sec. The results are plotted in Fig.15. From the results the PER of IEEE 802.15.4 is maintained constantly when only the IEEE 802.15.4 nodes are moving. When all the nodes are moving randomly with various speed the PER is changed considerably. When only the IEEE 802.11b nodes are moving randomly with various speed the PER is changed.

The Fig.16 shows the PER of IEEE 802.15.4 for grid topology with mobility model. The error depends on the proximity of transmitting WLAN nodes. Irrespective of the increment of transmitting nodes when the node move away from the PAN Coordinator the PER is less. The mobility model assumed for this grid topology is random way point. The transmitting nodes are moving with the speed of 3 meter/sec. The Fig.17 shows the impact of IEEE 802.11b on IEEE 15.4 for different mobility schemes by varying speed from 2meter/sec to 20 meter/sec with the step of 2 meter/sec.

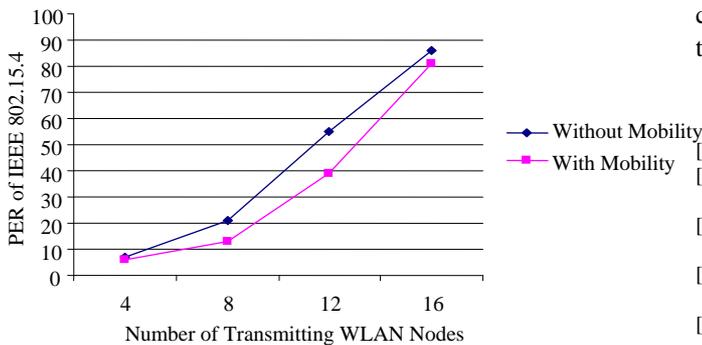


Fig 16. PER of IEEE 802.15.4 with the Mobility model for Grid topology

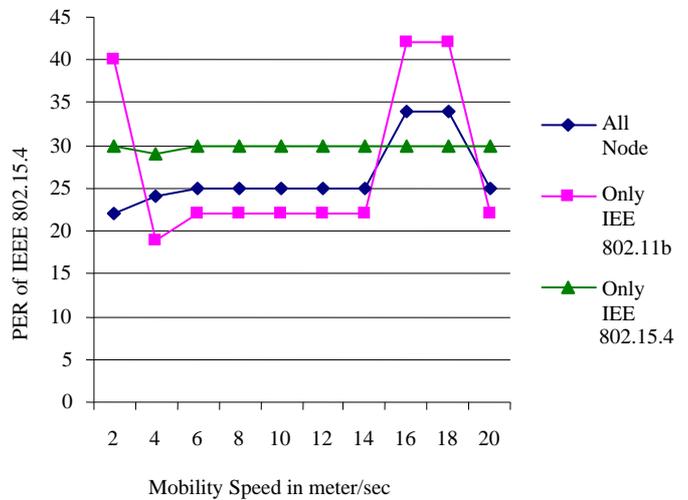


Fig.17 PER of IEEE 802.15.4 with the Mobility model (various speeds) for Grid topology

#### IV. CONCLUSION

We in this paper present analysis on probabilities of channel conflicts between IEEE 802.15.4 and IEEE 802.11b networks. The analytical results show that the channel conflict probability does increase (almost linearly) as the number of IEEE 802.11b networks increases. The packet error rate (PER) of the IEEE 802.15.4 under the IEEE 802.11b interference is analyzed. If the distance between the IEEE 802.15.4 and the IEEE 802.11b is longer than 4m, the interference of the IEEE 802.11b can be negligible to the performance of the IEEE 802.15.4, i.e., the PER is about zero. For the exact analysis of PER, the Grid and circular topology is examined. The simulation is completed with the assumption of mobility model with various speeds. In future the analysis can be extended for grid, circular and random topology with the consideration of power spectral density of IEEE 802.11b and IEEE 802.15.4 networks. Interference mitigation techniques can be incorporated with this scenario for error free transmission.

#### REFERENCES

- [1] "Bluetooth specifications v1.1," <http://www.bluetooth.com>.
- [2] "Ieee 802.15 wpan task group 1 (tg1)," <http://www.ieee802.org/15/pub/TG1.html>.
- [3] "Ieee 802.15 wpan task group 3 (tg3)," <http://www.ieee802.org/15/pub/TG3.html>.
- [4] "Ieee 802.15.4 wpan-lr task group," <http://www.ieee802.org/15/pub/TG4.html>.
- [5] "Ieee 802.11, the working group setting the standards for wireless lans," <http://grouper.ieee.org/groups/802/11/>.
- [6] J.Lansford, A. Stephens, and R. Nevo, "Wi-fi (802.11b) and Bluetooth: Enabling coexistence," IEEE Network, pp. 20-27, Sept/Oct 2001.
- [7] Ling-Jyh Chen, Tony Sun, Mario Gerla, "Modeling Channel Conflict Probabilities between IEEE 802.15 based Wireless Personal Area Networks", Communications, 2006. ICC apos;06. IEEE International Conference on Volume 1, Issue, June 2006 Page(s):343 - 348
- [8] Soo Young Shin, Hong Seong Parky, Sunghyun Choi, Wook Hyun Kwon, " Packet Error Rate Analysis of IEEE 802.15.4 under IEEE 802.11b Interference", IEICE Transactions on Communications 2007
- [9] Dae Gil Yoon, Soo Young Shin, Wook Hyun Kwon and Hong Seong Park, " Packet Error Rate Analysis of IEEE 802.11b under IEEE 802.15.4 Interference" Vehicular Technology Conference, 2006. VTC 2006-Spring. IEEE 63rd Publication Date: 7-10 May 2006 Volume: 3, On page(s): 1186-1190

- [10] A. Sikora, "Coexistence of IEEE802.15.4 (Zig-Bee) with IEEE802.11 (WLAN), Bluetooth, and Microwave Ovens in 2.4 GHz ISM-Band," web document, <http://www.ba-loerrach.de/stzedn/>, 2004.
- [11] Zigbee Alliance, "Zigbee specification v1.0," <http://www.zigbee.org/>, 2004.
- [12] G.M.Tamilselvan and Dr.A.Shanmugam, "Probability Analysis of Channel Collision between IEEE 802.15.4 and IEEE 802.11b using Qualnet Simulation for Various Topologies", International Journal of Computer theory and Engineering(IJCTE) 2009, Volume:1, On page(s):63-69



**G.M.Tamilselvan** received BE Degree in Electronics and Communication Engineering from Tamilnadu College of Engineering, Coimbatore in 1998 and ME Degree in Process Control and Instrumentation from Faculty of Engineering and Technology, Annamalai University in 2004. From 1998 to 2002 he worked as a faculty in NIIT. He was working as Lecturer in the department of ECE, Erode Sengunthar Engineering College during

2004-2007. Currently he is working as Lecturer in the Department of ECE, Bannariamman Institute of Technology, Sathyamangalam. He is doing part time research in Anna University, Coimbatore. His current research focuses on wireless heterogeneous networks, Interference mitigation, Mesh networks and Adhoc networks. He is member of ISTE and IACSIT, Singapore.

E-mail: [tamiltamil@rediffmail.com](mailto:tamiltamil@rediffmail.com)



**Dr.A.Shanmugam** received the BE Degree in PSG College of Technology in 1972, Coimbatore and ME Degree from College of Engineering, Guindy, Chennai in 1978 and Doctor of Philosophy in Electrical Engineering from Bharathiar University, Coimbatore in 1994. From 1972-76, he worked as Testing Engineer in Testing and Development Centre, Chennai. He was working as a Lecturer Annamalai University in 1978. He was the

Professor and Head of Electronics and Communication Engineering Department at PSG College of Technology, Coimbatore during 1999 to 2004. Authored a book titled "Computer Communication Networks" which is published by ISTE, New Delhi, 2000. He is currently the Principal, Bannari Amman Institute of Technology, Sathyamangalam. He is on the editorial board of International Journal Artificial Intelligence in Engineering & Technology (ICAIET), University of Malaysia, International Journal on "Systemics, Cybernetics and Informatics (IJSCI)" Pentagram Research Centre, Hyderabad, India. He is member of the IEEE, the IEEE computer society.

E-mail: [dras@yahoo.co.in](mailto:dras@yahoo.co.in)